



1.3MP 20X Optical zoom Network bullet PTZ Camera

Modello OBA-IPF-W3

- Hisilicon Compression main Chip .
- Built in 8 Cruise tracks and 4 pattern tours .
- OSD Menu test power in real time .
- Built-in Precision RTC clock for timing function
- Using 1/3 " Exmor CMOS HD Sensor
- Built in 20x Optical zoom ,16x digital zoom
- Supporta ONVIF , Hikvision Protocol
- Supporta with H.265,H.264 .
- Built in English and Chinese OSD Menu .
- OSD Menu English .
- Tilt speed : 0.1° ~20 °/S Pan speed : 0.1 °~60 °/S
- Preset speed : Pan; 6 0 °/S ,Tilt : 20 °/S
- Built-in 256 preset .
- Supporta 3D position
- Supporta Dynamic shelter privacy Area .
- Double ICR ,WDR,ROI,BLC
- IP66



Dimensioni:

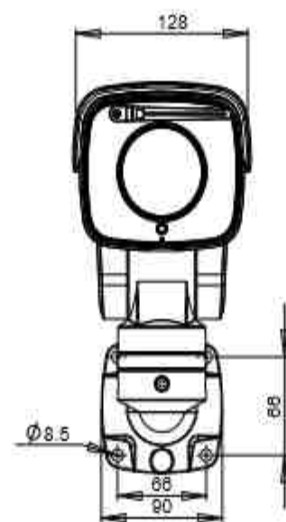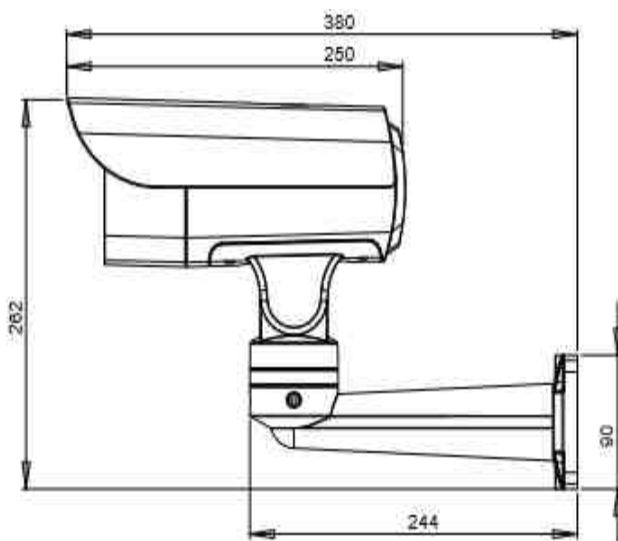

Caratteristiche :

Camera	Video	Sensore	1/3" CMOS Sensor	
		Pixel	960P(1920X960)	
		Electronic shutter	1/25s ~ 1/10000s	
		Iris	F1.6 ~ F4.4	
		Day&night	ICR	
		Min. Illuminazione	0.01Lux @(F1.6,AGC ON) ,0 Lux with IR	
	Audio	Audio Compressione	G.711-u law	
				AWB, AGC , Adjust
				Exposure Mode (Auto/Iris Priority/Shutter Priority/Manual)
				Sharpness, Saturation, Brightness & Contrast Adjustable
			3D Position	Supportato
			WDR	D-WDR
			Noise Reduction	2DNR/3DNR
			Image Orientation	Mirror/Flip
			Privacy Zone	Supportato
		Motion Detection	Supportato	
	Menu	OSD Menu English		
Compressione	Main chip	HI3518EV200		
	Video Compression	H.264/H.265		
	Frame	50HZ:25fps(1920x1080) 60HZ:30fps(1920x1080)		
	Bit rate	32kbps-10Mbps		
	Encode mode	VBR/CBR		
	Image Quality	Six levels under VBR; Free adjustment under CBR		
Specifiche	Lente	f=4.7-94mm		
	Iris	Auto Iris		
	Protezione	IP66		
	Bracket	Wall Bracket		
	Dimensioni	380mm×128mm×262mm		
	Peso	2.5kg		
PTZ	optical zoom	20X		

	IR distanza	100M
	Pan Range	0°~360°
	Tilt Range	-40°~60°
	Pan speed	0.1°~60°/ s
	Tilt speed	0.1°~20°/ s
	Preset	256
Conessioni	Network	RJ45
	Power	DC 12V
	TF Card slot	Max 64G TF Card
	Video	One Alarm I/O (Optional)
	Alarme	One Alarm I/O (Optional)
Network	Remote Monitoring	IE Browsing, CMS 3 Control Software
	User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	ONVIF	Supportato
	Ethernet	100Mbps
Altro	Power	DC12V
	Work Environment	-30°C~60°C, 10%~90% Humidity